



SD KIT ELK - ECK

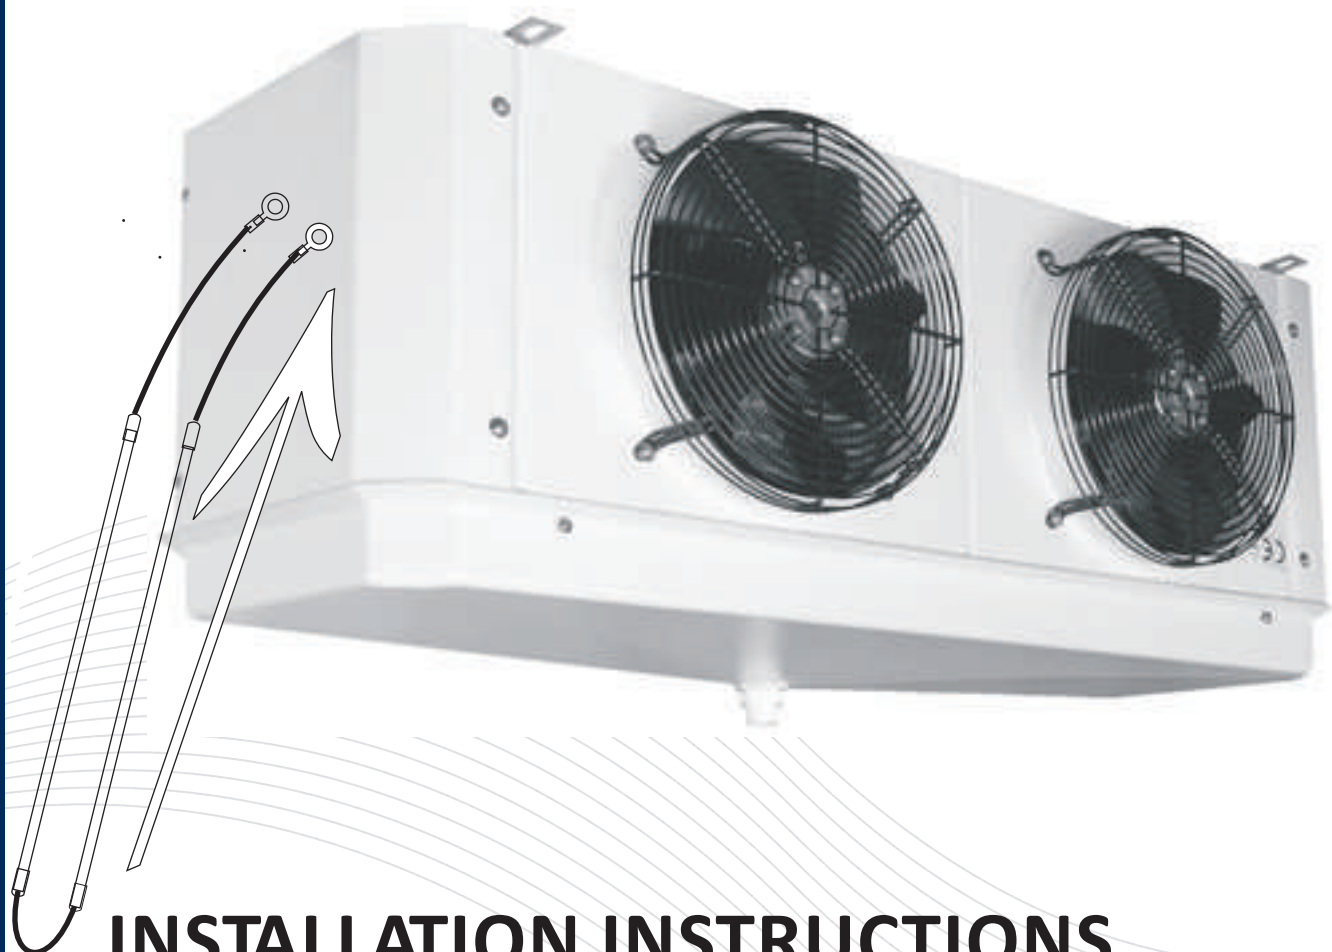

INSTALLATION INSTRUCTIONS MANUALE D'INSTALLAZIONE NOTICE TECHNIQUE D'INSTALLATION INSTALLATIONSNOTIZ

WTG - Quantor GmbH
Europa-Allee 53, D-54343 Föhren
Tel.: + 49 (0)6502 - 999 95-0
Fax: + 49 (0)6502 - 999 95-75
www.quantor.technology info@quantor.technology

1. REMOVAL OF DRAIN PAN AND SIDE PANELS
SMONTAGGIO BACINELLA E FIANCHI LATERALI
DEMONTAGE EGOUTTOIR ET PANNEAUX LATERAUX
AUSBAU DER TROPFWANNE UND DEN SEITENWÄNDE

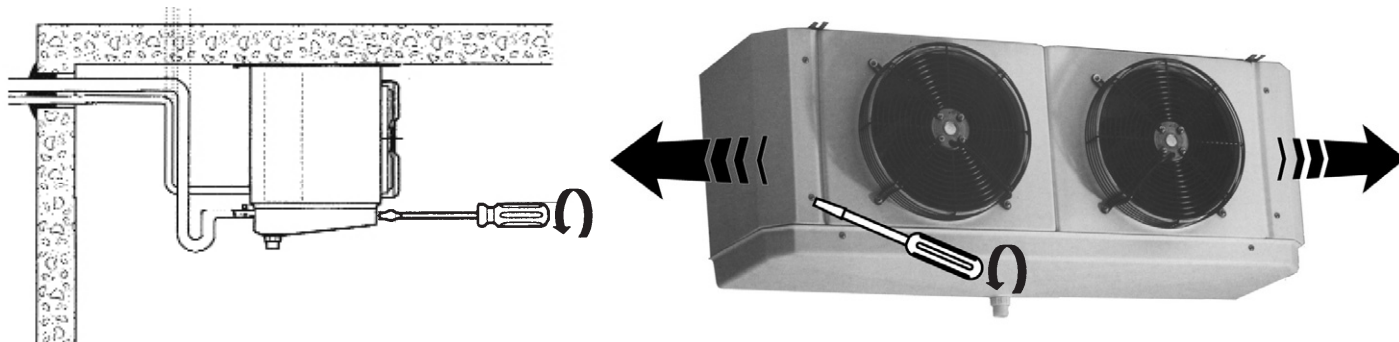




2. POSITIONING COIL HEATERS
POSIZIONAMENTO RESISTENZE NELLA BATTERIA
POSITIONNEMENT DES RESISTANCES DANS LA BATTERIE
POSITIONNIERUNG DER HEIZSTÄBE IN DER BATTERIE

Kit ELK

$\Omega : 3 + 1$

SD ... R

SD ... L

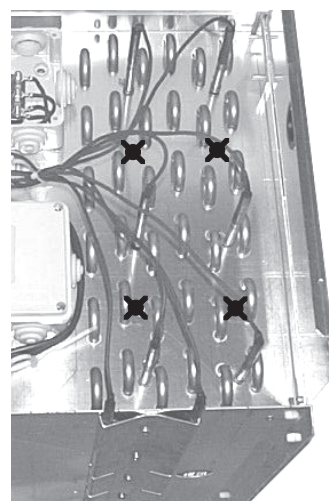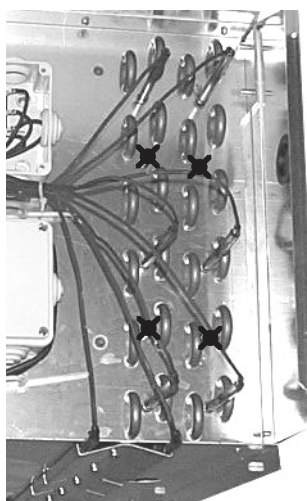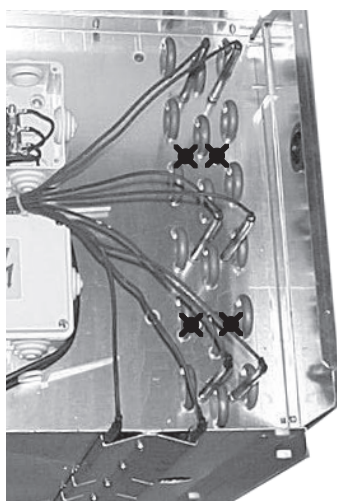


Kit ECK

$\Omega : 2$


SD ... R

SD ... L


SD ... C

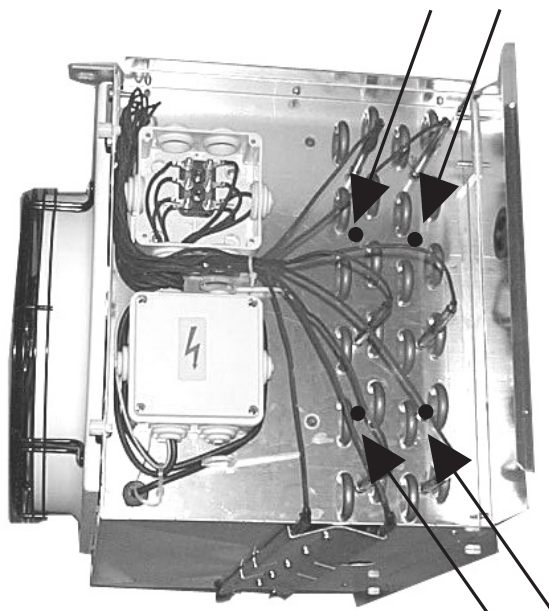

3. HEATERS MOUNTING
MONTAGGIO DELLE RESISTENZE
MONTAGE DES RESISTANCES
EINBAU DER HEIZSTÄBE



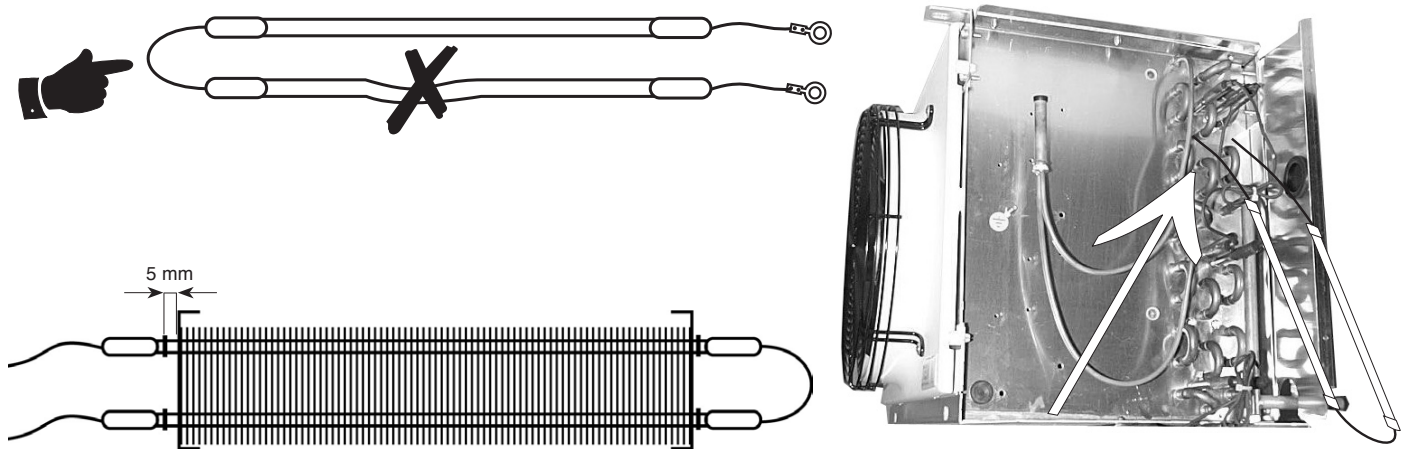


4. DEFROST HEATER CONNECTION
COLLEGAMENTO DELLE RESISTENZE
RACCORDEMENT DES RESISTANCES
ANSCHLUSS DER HEIZSTÄBE

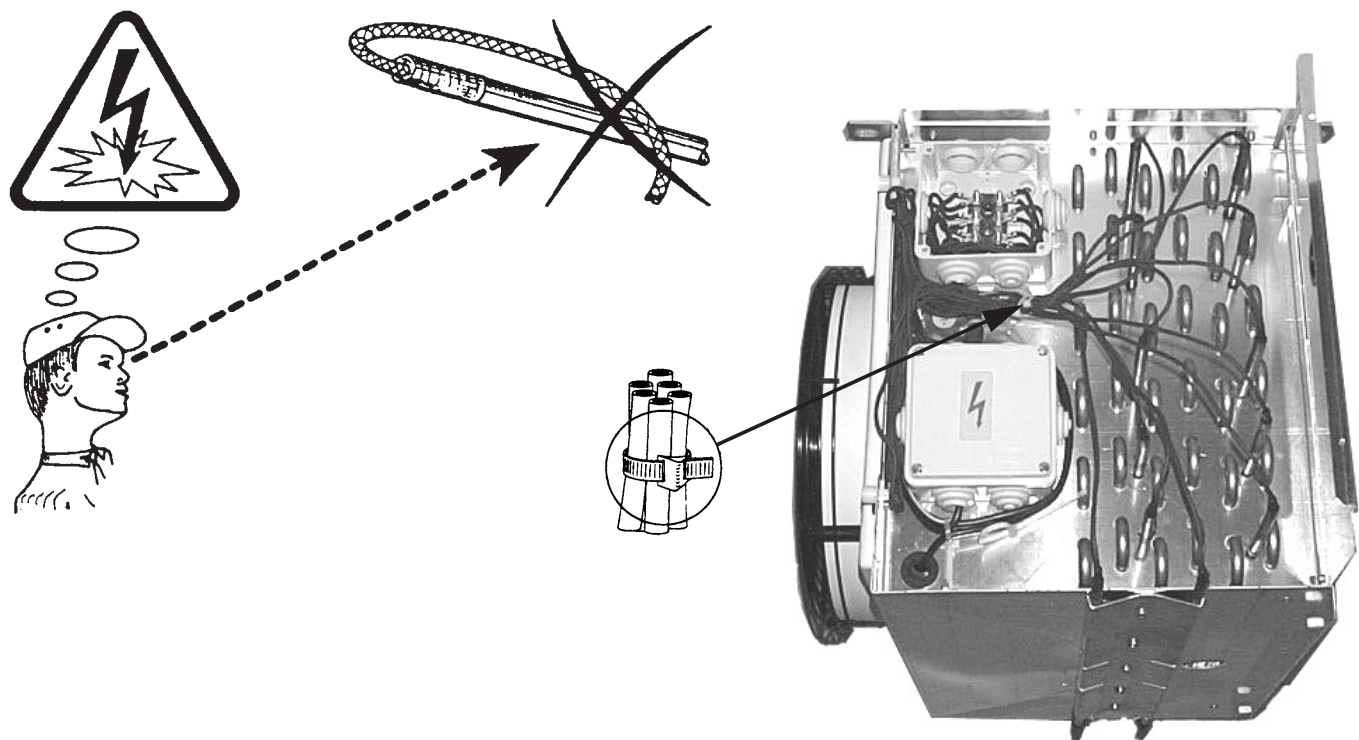


Type / Modello	SD ... R (4.23 mm)	024	030	038	052	062	082	104	118	148	158
Modele / Modell	SD ... L/C (6.35 mm)	021	027	035	048	055	073	095	110	136	148
Defrost / Sbrinamento	standard 230-1-50/60 Hz W	1000	1000	1000	1600	2160	2160	3280	3280	3280	4400
Degivrage / Abtauung	max (ECK) 230-1- 50/60 Hz W	1500	1500	1500	2400	3240	3240	4920	4920	4920	6600
SD ... C	400-350/60 Hz										

5. ELECTRIC CONNECTION
COLLEGAMENTO ELETTRICO
RACCORDEMENT ELECTRIQUE
ELETRISCHER ANSCHLUSS

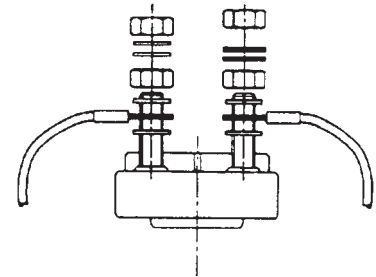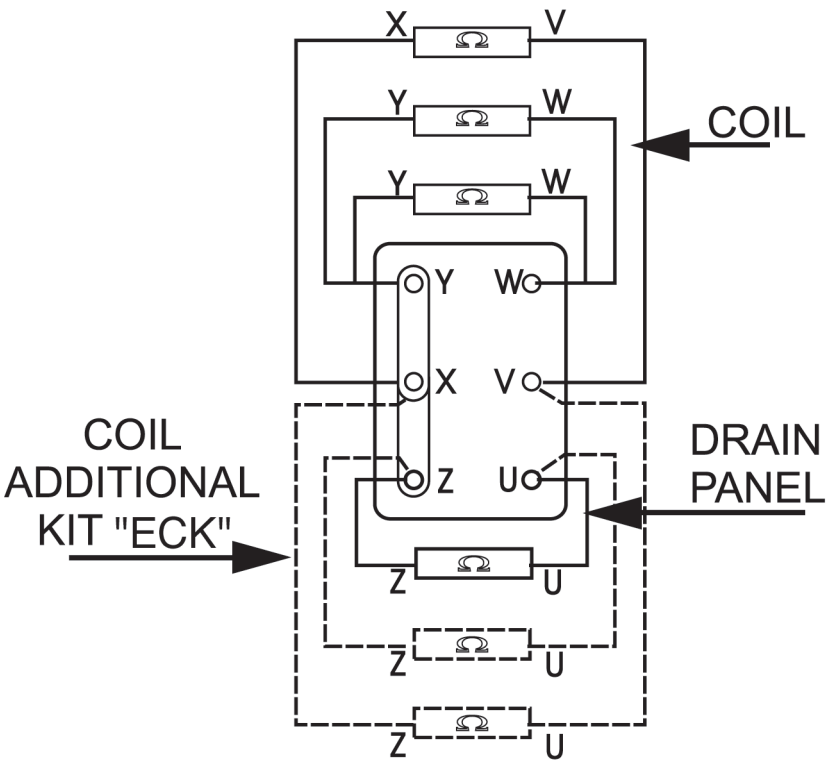

230 V/1/50-60 Hz

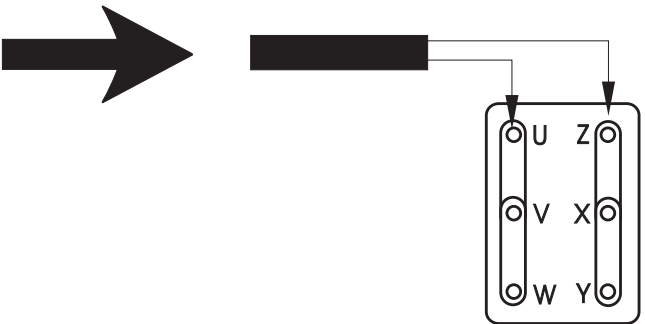

400 V/3/50-60 Hz

